



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T3S R3W


SEC 4  
1/4  
SEC 9

U.S.B.&M.

V-11



SCALE: 1"=30'

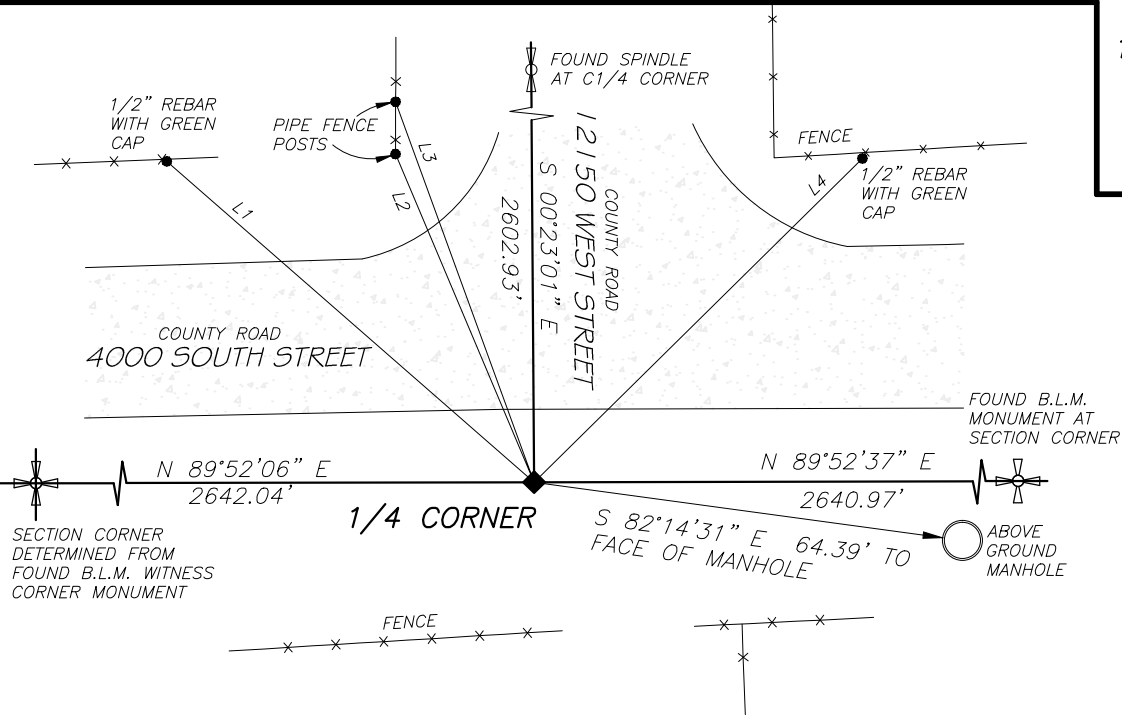

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC NORTH DERIVED FROM G.P.S. OBSERVATIONS AT A CONTROL POINT (SECTION CORNER) LOCATED AT LAT. 40°17'09.08764"N AND LONG. 110°18'46.76040"W USING THE UTAH STATE G.P.S. VIRTUAL REFERENCE STATION CONTROL NETWORK MAINTAINED AND OPERATED BY THE AUTOMATED GEOGRAPHIC REFERENCE CENTER

LINE	BEARING	DISTANCE
L1	N 48°51'43" W	76.16'
L2	N 22°53'15" W	55.63'
L3	N 19°58'40" W	63.23'
L4	N 45°25'01" E	72.08'

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND B.L.M. ALUMINUM PIPE AND CAP MONUMENT AT POSITION OF 1/4 CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

PLACED TWO 1/2" REBAR WITH GREEN CAPS MARKED "REFERENCE MARKER" AND REFERENCED AS SHOWN



PHOTO OF MARKINGS ON MONUMENT

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7259974.433  
E: 1995456.619  
NAVD88 EL: 5453.04'

LATITUDE: 40°14'36.88234" N  
LONGITUDE: 110°13'41.04572" W  
ELLIPSOID HEIGHT: 5396.35'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300030S0030W0\_340600



PHOTO OF MONUMENT FACING SOUTH

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 24 MAY '19

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

